




introduces a compact and sleek eight channel audio splitter model DA-88. It splits a balanced stereo/mono line level signal into 4 stereo or 8 mono balanced line level outputs. DA-88 facilitates paralleling of a large number of PA amplifiers / boosters. It accepts both balanced as well as unbalanced line level signals.

Features

- Compact and rugged professional line level signal splitter.
- Designed for use in a wide variety of indoor and outdoor PA applications.
- Accepts Line Level Stereo as well as Mono inputs through F/XLR connector as well as 1/4" Stereo Jack.
- Splitter provides four stereo balanced outputs or eight mono balanced outputs through M/XLR connectors.
- Individual volume control for each input & output channel.
- Separate clip LED indicator for Left and Right input signal.
- Easy to operate Stereo/Mono push switch provided on front panel.
- Operates on AC mains.
- 19" rack mountable in 1U size and usable as a table top unit also.

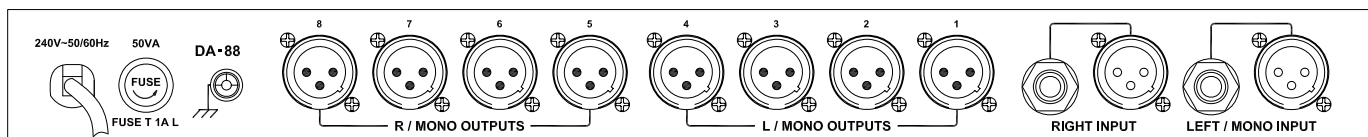

Rear Panel

Specifications

Output Channels	8 × 1V / 50Ω Balanced
Input Channels	2 × 100mV / 20kΩ Balanced
Frequency Response	20 – 20,000Hz
Distortion	0.1%
Signal to Noise Ratio	70dB
Indications	Power ON LED 2 x Clip LED (4dB prior to true clip)
Power Supply	AC: 220 - 240V 50 / 60Hz
Dimensions	W483 × H52 × D195 mm
Weight	2.80kg approx.