


L15-MB400®

High power 15" low frequency speaker
400 WATTS

- Excellent low and mid frequency response.
- Ideal for high power 2-Way Speaker Systems.
- Triple roll, exponential cone geometry.
- High temperature copper clad aluminium wire voice coil wound on polyamide former.

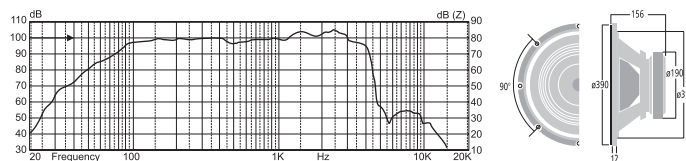

SPECIFICATIONS		L15-MB400®
POWER RATING		400W RMS/800W Programme
NOMINAL DIAMETER		380mm (15")
NOMINAL IMPEDANCE		8Ω
SENSITIVITY (1W/1m)		99dB
MAGNET WEIGHT		2.31kg
RESONANT FREQUENCY (Fs)		40Hz
DC RESISTANCE (Re)		5.8Ω
ELECTROMAGNETIC Q (Qes)		0.41
MECHANICAL Q (Qms)		8.0
TOTAL Q (Qts)		0.39
COMPLIANCE EQUIVALENT VOLUME (VAS)		168Litr
SURFACE AREA OF CONE (Sd)		855cm²
REFERENCE EFFICIENCY (ηo)		2.72%
VOICE COIL		3.0"
OVERHANG (Xmax)		6.0mm
MOVING MASS (Mms)		91gm
BL PRODUCT (BL)		18TM
COIL INDUCTANCE (Le)		1.1mH
OVERALL DIAMETER		389.5 mm
DEPTH		157 mm
BAFFLE HOLE DIAMETER		350 mm