


SK-15FR®X/SK-15FR®Z

High efficiency 15" dual cone full range speaker
200 WATTS

- 30.48cm (12") dual cone speaker with wide spectrum frequency response.
- High quality specially designed imported cones and spider for extremely clear, low distortion sound reproduction.
- Impedance of DX12-F200 is 8Ω and DZ12-F200 is 16Ω.
- 5.08 cm (2") CCAW voice coil with high temperature rating for safe, reliable operation.

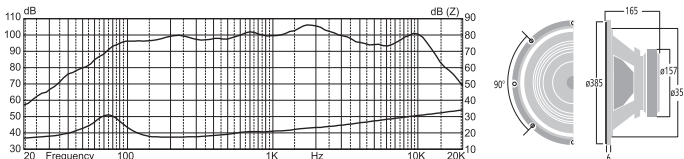

SPECIFICATIONS		SK-15FR®X/SK-15FR®Z
POWER RATING		200W RMS/400W Programme
NOMINAL DIAMETER		380mm (15")
NOMINAL IMPEDANCE		8Ω/16Ω
SENSITIVITY (1W/1m)		98 dB
MAGNET WEIGHT		1.54kg
RESONANT FREQUENCY (Fs)		75Hz
DC RESISTANCE (Re)		6.5 Ω/11.0Ω
ELECTROMAGNETIC Q (Qes)		0.91
MECHANICAL Q (Qms)		5.07
TOTAL Q (Qts)		0.77
COMPLIANCE EQUIVALENT VOLUME (VAS)		75.11Litr
SURFACE AREA OF CONE (Sd)		830cm²
REFERENCE EFFICIENCY (η10)		3.18%
VOICE COIL DIAMETER		2.0"
OVERHANG (Xmax)		4.0 mm
MOVING MASS (Mms)		60.62gm
BL PRODUCT (BL)		14.23TM
COIL INDUCTANCE (Le)		0.78mH
OVERALL DIAMETER		385 mm
DEPTH		165 mm
BAFFLE HOLE DIAMETER		355 mm