Our Luxury Vinyl Tile

ALTERNATIVE ATTITUDE Creative innovation in regard to flooring

SUBSIDIARY PRODUCTS

Above Woods, wooden-pattern surface; **Beyond Stones**, stone-like effect; **After Human**, for manufactured decorative design; **Upon Colors**, creative blush palette.



UNCONVENTIONAL FLOORING DESIGN
Upon Colors, another colorful and
fresh way of action

G.



OI. OUR GOAL

Thanks to the **ultimate technology** our **Inkpression** system can insure vivd **colors**, prefect **geometries** and great **performances**.

Crowded cities and their busy traffic can be stressful, but are a certain part of most commuters' everyday lifestyle. To balance it out, we bring nature into people's life, employing a number of methods, using natural materials, natural patterns or simply natural colors.






VOXFLOR is always looking forward to **new solutions** and **advanced technologies** to improve its products in every direction, especially exploring **green resources** and enviroinmental friendly **innovations**.

your color story

Since Italy has always been the global center of Innovation and Milano one of the Word Capital of Fashion and Design, VOXFLOR settles there its creative center.

A multicultural Team of Architects, Graphics, Fashion and Product designers, study, suggest and develop new trends, fresh flavours and inventive alternatives, to offer our clients the ultimate solutions for carpet tiles.

In this way VOXFLOR sums up the top skills of a Chinese Manufacturer and the most original ideas of Italian Design, in a perfect mix of Western and Eastern taste, to develop the complete global vision of a Design Driven International Company.

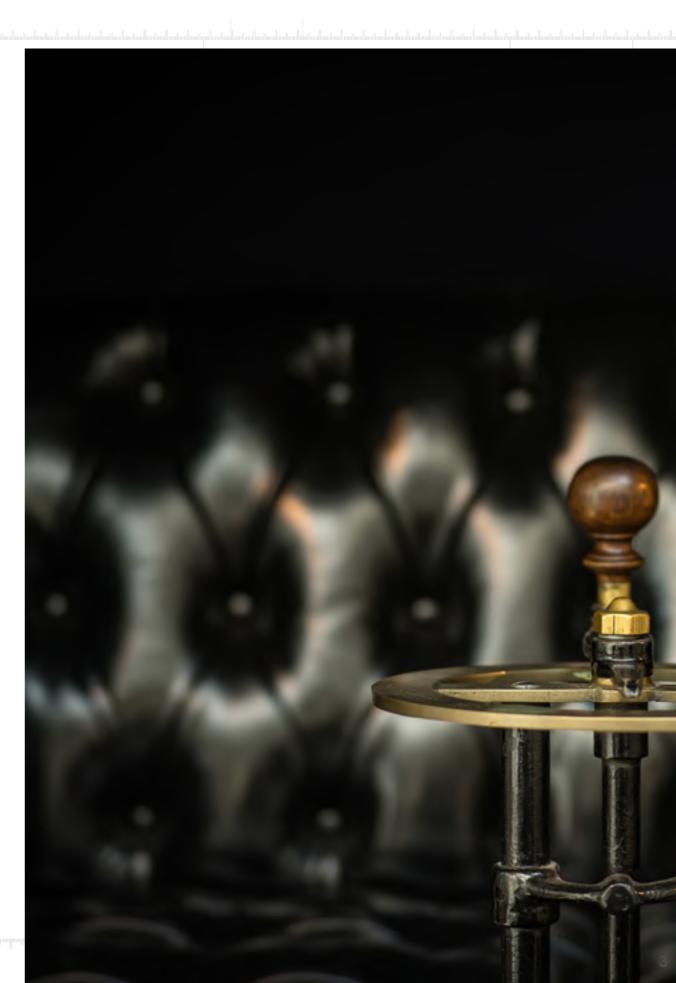



LVT is defined as a semi-rigid polyvinyl chloride block floor under nation standards.

LVT is defined as **resilient floor coverings** under international standards.

LUXURY VINYL TILE RESILIENT FLOORING COVERINGS

Luxury Vinyl Tile (abbreviation: LVT) is known as stone plastic or PVC flooring. It is made of polyvinyl chloride or vinyl resin and is added to the appropriate stone powder additive for the floor (or wall) decoration in the building.



Wood patterns and colors provide **a warm and cozy feeling** in any interior space in any way the designer decides to use them.

Distance changes utterly when you take the world on foot. A mile becomes a long way, two miles literally considerable, ten miles whopping, fifty miles at the very limits of conception. The world, you realize, is enormous in a way that only you and a small community of fellow hikers know. Planetary scale is your little secret.



MOSS 0244 STONE EDGE 30244 ABOVE WOODS A-01

\$==

ABOVE WOODS A-03; B-04



Wood is **universally beautiful** to man.

It is the most humanly **intimate** of all materials.

ABOVE WOODS A-02; A-03





PS: From Above woods C to Above woods I are all in an alternative plank size in 23.66 X 153.2 cm.

ABOVE WOODS C-05

Raw or refined, smooth or rough, it always helps to brighten the space and give a familiar atmosphere.




ABOVE WOODS D-09



ABOVE WOODS D-11



ABOVE WOODS F-06

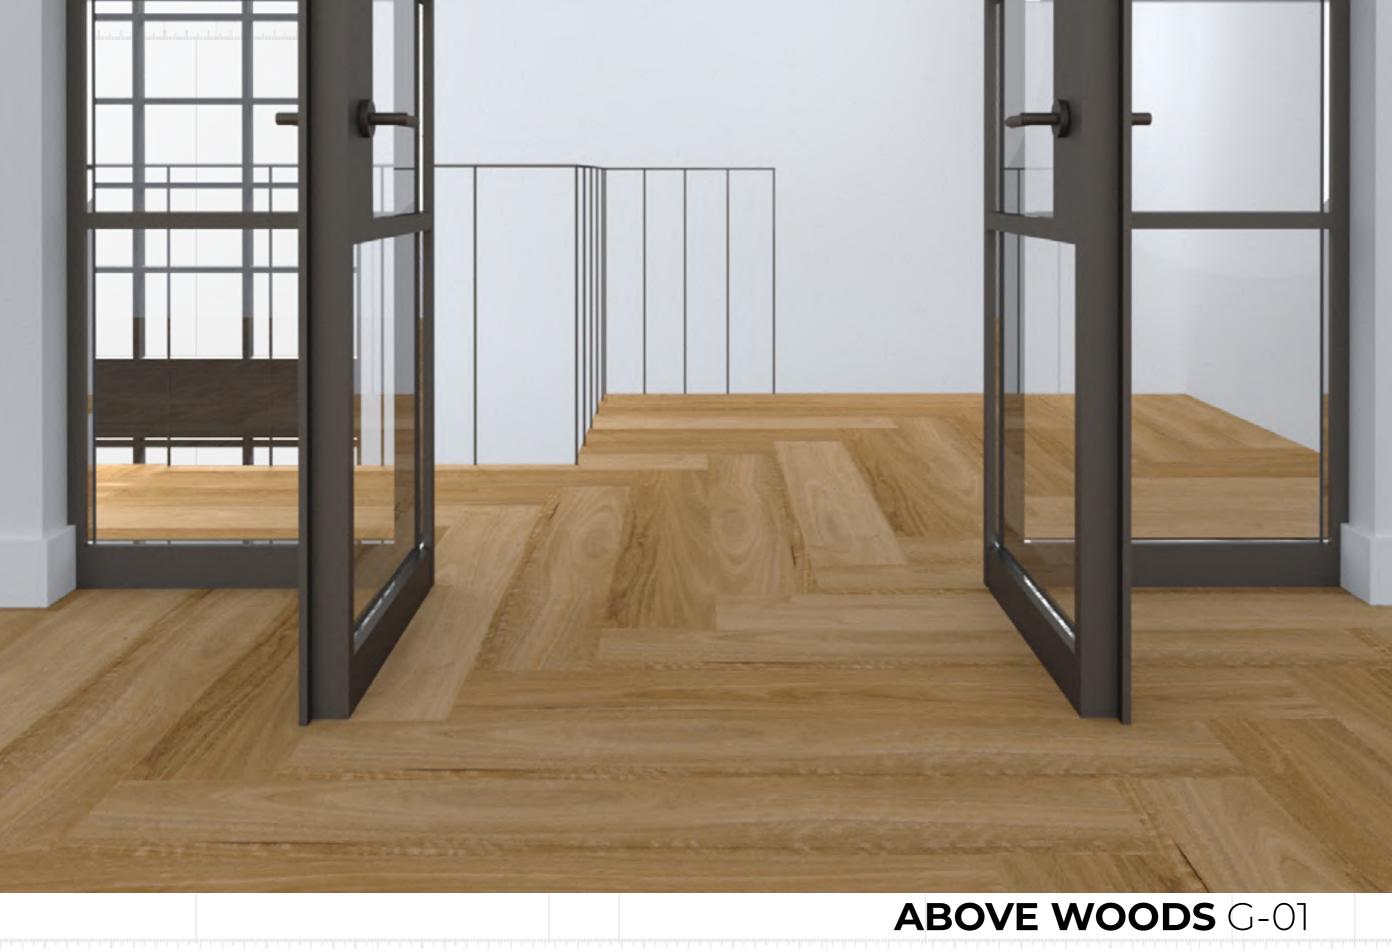







LVT. - BEYOND STONES

Life is short and fragile while the stone is eternal and perfect.

> No better way is there to learn to love Nature than to understand Art. It dignifies every flower of the field. And, the boy who sees the thing of beauty which a bird on the wing becomes when transferred to wood or canvas will probably not throw the customary stone.

The religious beliefs of the primitive society were full of eternal pursuits and awe of the nature and gods. Stones became a medium of communication with the gods.

BEYOND STONES A-01; A-02; A-03

Neat thing? Distil





BEYOND STONES A-05

BEYOND STONES A-07 **SCANDINAVIA** ALMHULT-300; 500









BEYOND STONES C-01; c-03; C-05

50



BEYOND STONES D-03



BEYOND STONES E-01



In the **previous chapters**, we have shown many **elements could recall the nature** on its own texture; Apart from those we have create this After Human products.

And here, the feature of the pattern you may have seen many times on the interior material basis. It's polished and artificial, all in luxury vinyl tiles.

A painter makes patterns with shapes and colours, a poet with words. A painting may embody an "idea," but the idea is usually commonplace and unimportant. In poetry, ideas count for a good deal more; but, as Housman insisted, the importance of ideas in poetry is habitually exaggerated. ... The poverty of ideas seems hardly to affect the beauty of the verbal pattern. A mathematician, on the other hand, has no material to work with but ideas, and so his patterns are likely to last longer, since ideas wear less with time than words.




AFTER HUMAN A-08 ABOVE WOODS D-07 "Stone, steel, dominions pass, Faith too, no wonder; So leave alone the grass That I am under."

– A.E. Housman, More Poems

AFTER HUMAN B-03



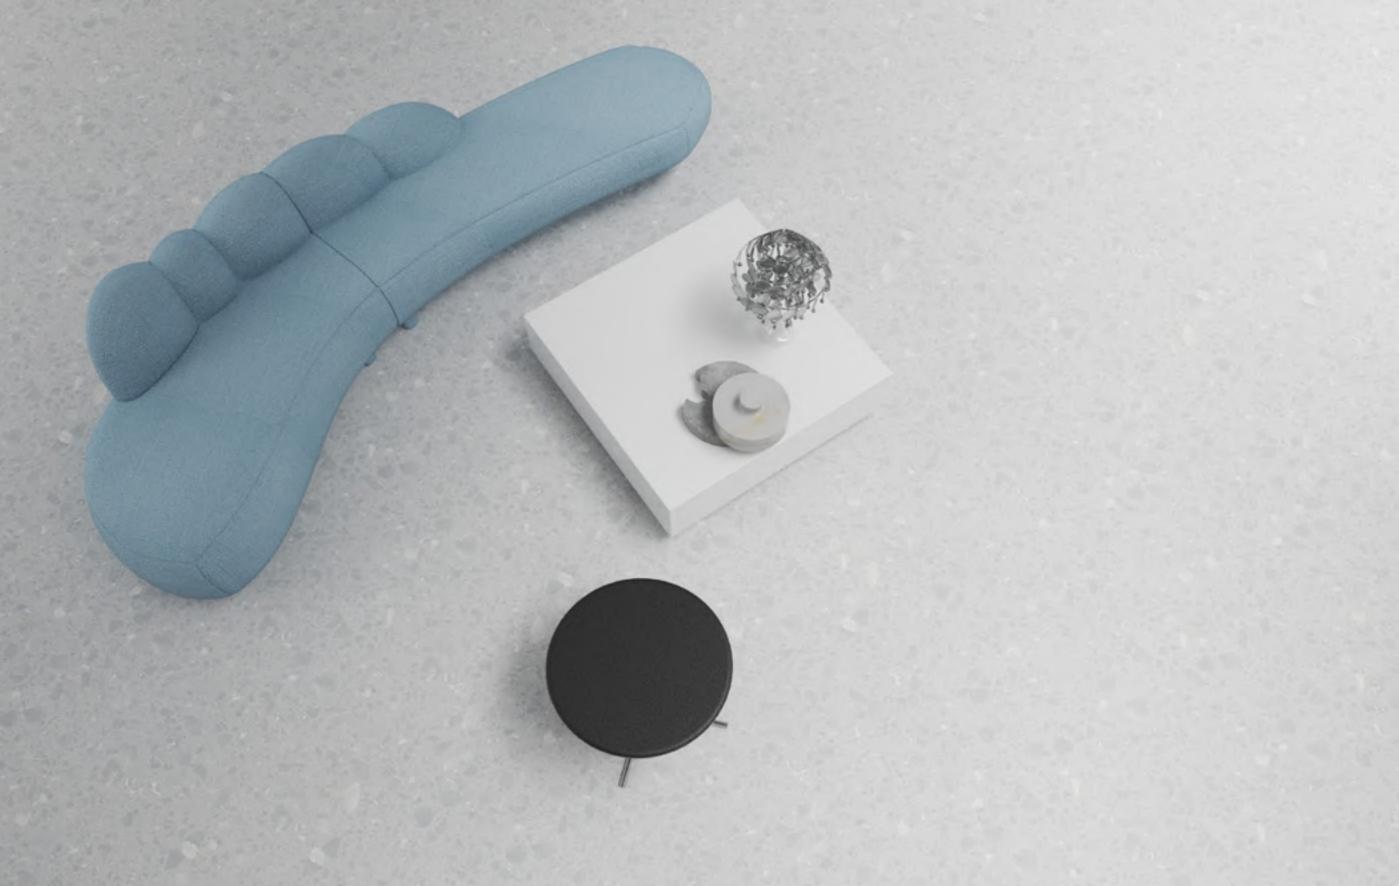

AFTER HUMAN B-07



AFTER HUMAN C-02



UPON COLORS



Color is a power which directly influcences the soul.

"The purest and most thoughtful minds are those which love color the most."

– John Ruski

UPON COLORS 07;11;1 SPACEWALK 300-5



You select the **colors of your thoughts**: drab or bright, weak or strong, good or bad.

You select the **colors** of your emotions: d i s c o r d a n t o r harmonious, harsh or quiet, weak or strong.

UPON COLORS 05; 06; 07 BEYOND STONES B-07

UPON COLORS 08; 10 ABOVE WOODS A-03 20

You select the **colors of your acts**: cold or warm, fearful or daring, small or big.

UPON COLORS 12; 18 **BEYOND STONES** A-02



UPON COLORS 13; 16; 19 SPACEWALK 100-3


LVT. FEATURES & CONSTRUCTION

LVT is defined as a semi-rigid polyvinyl chloride block floor under nation standards.

LVT is defined as **resilient floor coverings** under international standards.

A hard surface option which can be, for laying system and thickness, perfectly combined with carpet tiles. LVT is the latest generation of vinyl flooring, the acronym stands for Luxury Vinyl Tiles and offer several options of colors, patterns, and finishings in order to extend and multiply our offer according to the latest trends.



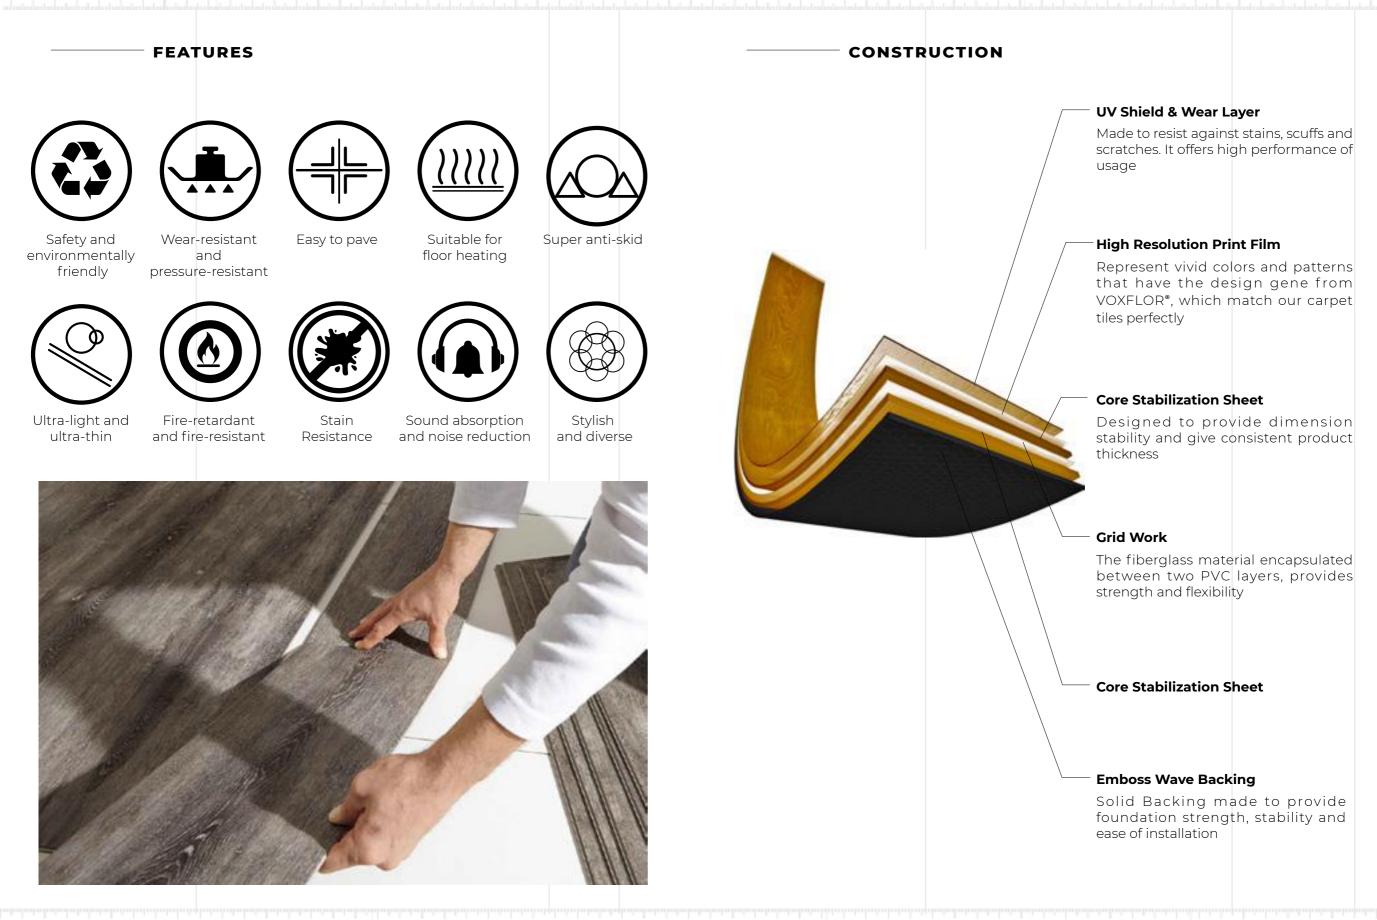



LOOSE LAY


Suitable for thickness of 4.5~6mm, high-end products, contains fiberglass mesh interlayer.








General demand; easiest way where glue is not needed; in some cases glue might be applied to the tile four corners.

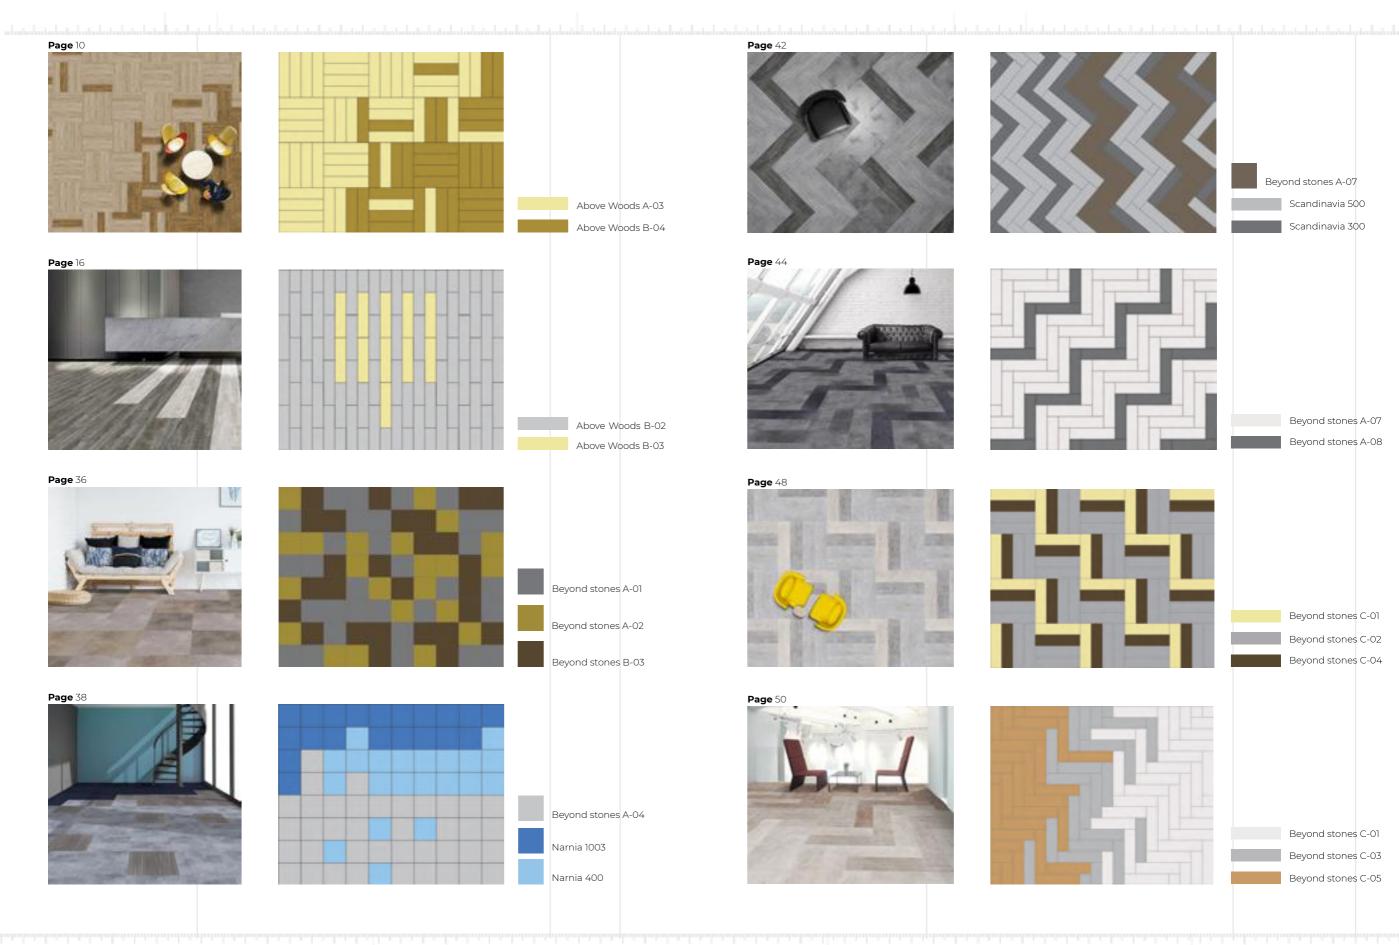

Page 76 **Page** 70 Spacewalk 300-5 Upon Colors 07 Upon Colors 11 Upon Colors 14 Page 72 **Page** 78 Beyond stones B-01 Upon Colors 07 Upon Colors 06 Upon Colors 05



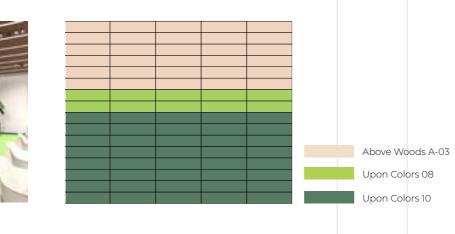



Beyond Stones A-02

Upon Colors 12

Upon Colors 18

Spacewalk 100-3

Upon Colors 13

Upon Colors 16

Upon Colors 19



SPECIFICATION.

- ABOVE WOODS A,B

Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	25cm * 100cm
Pieces per Box:	8 pcs/box (2m²)
Fire Rating:	EN13501-1:2007+A1:2009 Bf1-s1
	GB8624-2012 B1(B-s1, t0)
Slip Resistance:	EN13893:2002, DS
Performance:	EN ISO 10582: 2012
	GB/T 4085-2015
Usage Classification:	43 class
Warranty:	15 Year Limited Commercial Warranty
Installation Method:	Loose Lay
	ABOVE WOODS C,D,E,F,G,H,I
Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	23.66cm * 153.2cm

Wear Layer Thickness:0.5Wear Layer Treatment:UVTile Size:23.Pieces per Box:8 pFire Rating:ENGESlip Resistance:ENPerformance:ENUsage Classification:43Warranty:15 VInstallation Method:Looper

5.00 mm 0.50 mm UV 23.66cm * 153.2cm 8 pcs/box (2m²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012 GB/T 4085-2015 43 class 15 Year Limited Commercial Warranty Loose Lay

COLORS	BEYOND STONE			
A- 01	A-02 A-	03 A- 04	A- 05	
A-06	A-02 A-		A-03	
				and a state of the
B -01 B -02 B	-03 B -04 B -05	C -01 C -02	C -03 C -04 C -05	5
D -01	D- 03	E -01 E -04		

SPECIFICATION.

Tile Size:

Pieces per Box:

Slip Resistance:

Performance:

Warranty:

Fire Rating:

- BEYOND STONE A,D; B,C

Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	50cm * 50cm; 25cm * 100cm
Pieces per Box:	8 pcs/box (2m²)
Fire Rating:	EN13501-1:2007+A1:2009 Bf1-s1
	GB8624-2012 B1(B-s1, t0)
Slip Resistance:	EN13893:2002, DS
Performance:	EN ISO 10582: 2012
	GB/T 4085-2015
Usage Classification:	43 class
Warranty:	15 Year Limited Commercial Warranty
Installation Method:	Loose Lay
	BEYOND STONE E
	BETOND STONE E
Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV

30.48cm * 60.96cm $8 \text{ pcs/box} (2\text{m}^2)$ EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012 GB/T 4085-2015 **Usage Classification:** 43 class 15 Year Limited Commercial Warranty Installation Method: Loose Lay



SPECIFICATION.

- AFTER HUMAN A,B,C,D

Total Thickness:	5.00 mm
Wear Layer Thickness:	0.50 mm
Wear Layer Treatment:	UV
Tile Size:	30.48cm * 60.96cm
Pieces per Box:	8 pcs/box (2m²)
Fire Rating:	EN13501-1:2007+A1:2009 Bf1-s1
	GB8624-2012 B1(B-s1, t0)
Slip Resistance:	EN13893:2002, DS
Performance:	EN ISO 10582: 2012
	GB/T 4085-2015
Usage Classification:	43 class
Warranty:	15 Year Limited Commercial Warranty
Installation Method:	Loose Lay
	UPON COLORS
	UPON COLORS
Total Thicknoss:	
Total Thickness:	5.00 mm
Wear Layer Thickness:	5.00 mm 0.50 mm
Wear Layer Thickness: Wear Layer Treatment:	5.00 mm 0.50 mm UV
Wear Layer Thickness: Wear Layer Treatment: Tile Size:	5.00 mm 0.50 mm UV 25cm * 100cm
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²)
Wear Layer Thickness: Wear Layer Treatment: Tile Size:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0)
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating: Slip Resistance:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating: Slip Resistance: Performance:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012 GB/T 4085-2015
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating: Slip Resistance: Performance: Usage Classification:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012 GB/T 4085-2015 43 class
Wear Layer Thickness: Wear Layer Treatment: Tile Size: Pieces per Box: Fire Rating: Slip Resistance: Performance:	5.00 mm 0.50 mm UV 25cm * 100cm 8 pcs/box (2m ²) EN13501-1:2007+A1:2009 Bf1-s1 GB8624-2012 B1(B-s1, t0) EN13893:2002, DS EN ISO 10582: 2012 GB/T 4085-2015

