


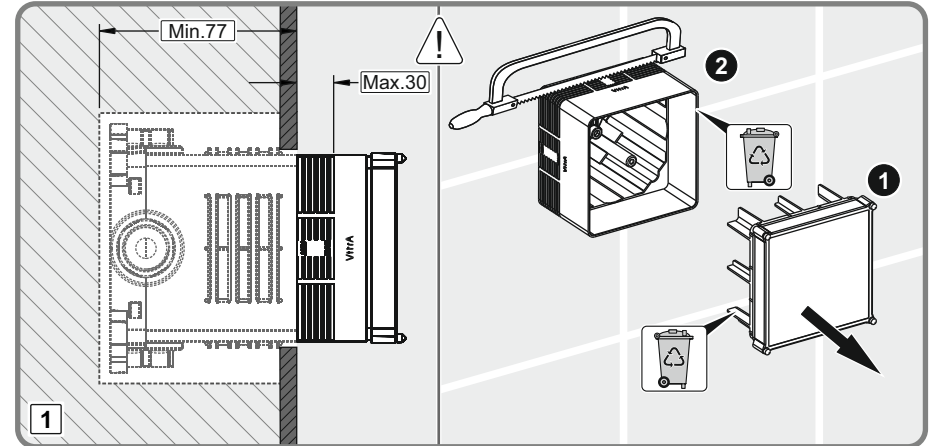
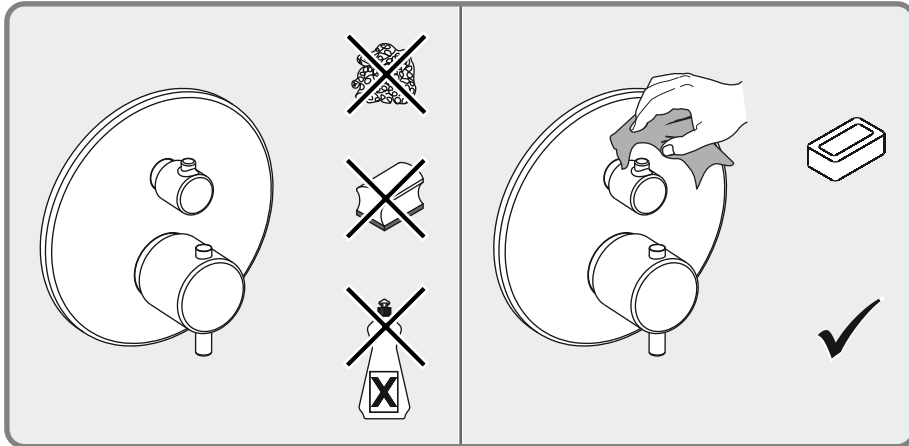


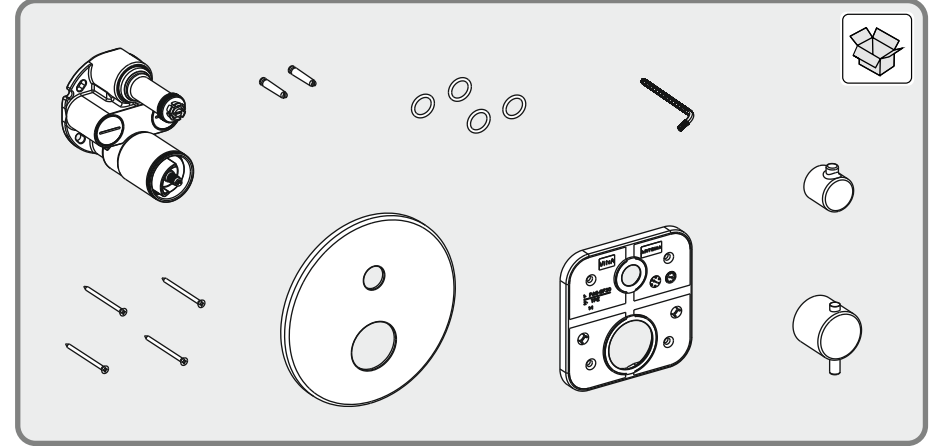

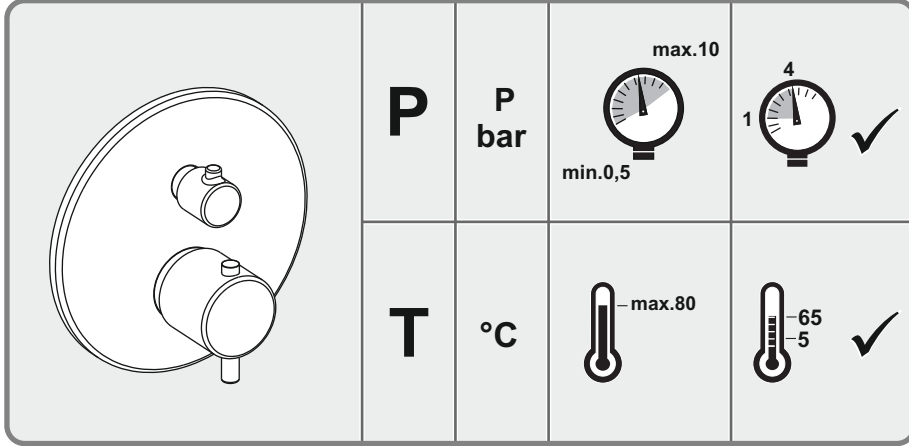

In order to operate the thermostatic batteries efficiently, the dynamic pressure in the hot and cold water infrastructure has to be at least 1 bar. The difference of pressure should not exceed 0.5 bar between hot and cold water.

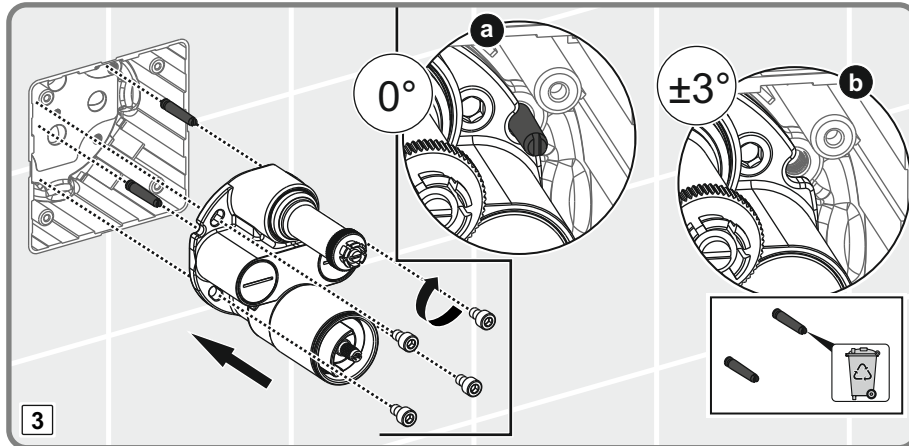